

florprotec® Powerclad is the new and revolutionary heavy duty scaffold sheet protection product.

florprotec® **Powerclad Scaffold Sheeting** is a reinforced polyolefin sheeting system for temporary containment and weather protection applications. Powerclad reinforcement bands incorporate eyelets every 10cm to provide a versatile system for all tube & fitting and modular scaffolding systems and the ability to vary the support density according to anticipated wind forces.

Both flame retardant and non-flame retardant grades are available. Flame retardant grades are LPCB approved to LPS 1215 and LPS 1207.

Key features:

- Safe to use on all sites
- Provides the perfect alternative to any scaffold sheeting on the market
- Non-hazardous and totally environmentally friendly
- Water cleanable when wet
- Excellent hiding, masking and shielding
- Easy to use
- Flame retardant
- Use one bag (100) Powerclad Powerties elasticated toggle per roll of scaffold sheeting for correct installation. (1 tie per m², refer to manufacturer fitting inst.)

Product details:

PCLADSTD 2x45 (Powerclad Standard Non FR 2m x 45m) 170GSM

PCLADFR2x45m (Powerclad FR 2m x 45m) 170GSM

PCLADFR2.0 (Powerclad Premium FR 2m x 45m) 240GSM

TOGGLE TIES (Elasticated toggles 100 per bag)

Applications:

florprotec® Powerclad Scaffold Sheeting is suitable for all tube & fitting and modular scaffolding systems. Install to *BS 8410* Code of practice for lightweight temporary cladding for weather protection and containment on construction works.



We recommend using one bag minimum (100) of Powerclad Powerties elasticated toggle per roll of scaffold sheeting for correct installation.

Bespoke:

Bespoke printing of company logo is available, contact your local representative for more details.

Note:

For BS7955 compliance, min. tensile strength 630N/50mm, min. Eyelet strength 500N, min. Fastener strength 500N

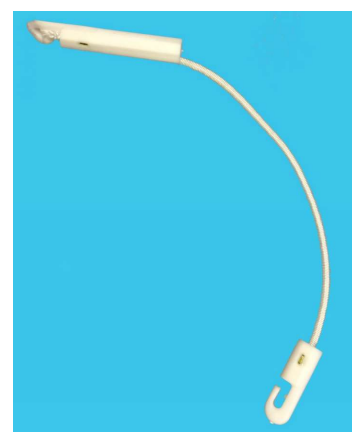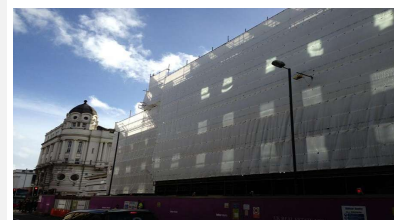

florprotec® help-desk tel: 01827 831440
florprotec® fax: 01827 831441
florprotec® email: sales@florprotec.co.uk

florprotec® support
Account manager: T: 07966 858371
E: jonathan.heap@florprotec.co.uk



Relay Park, Relay Drive, Tamworth, Staffordshire B77 5PR